

SOT-89 LDO High Input Voltage Three Terminal Regulator 低功耗高输入电压三端稳压 IC

■Features 特点

1.GND 2.Vi 3.Vo

Low Quiescent Current 低静态电流: 1 μ A

High Input Voltage 高输入电压: Up to 高达 18V

High Precision Output Voltage 高精度输出电压: $\pm 2\%$


■Application 应用

Battery Power Supply Equipment 电池供电设备

Hand-Hold Equipment 手持设备

GPS Receivers 卫星导航接收器

Wireless LAN 无线网设备



■Absolute Maximum Ratings 最大额定值

(TA=25°C unless otherwise noted 如无特殊说明, 温度为 25°C)


Characteristic 特性参数	Symbol 符号	Rating 额定值	Unit 单位
Input Voltage 输入电压	V _i	18	V
Operating Current 工作电流	I _O	500	mA
Power dissipation 耗散功率	P _D (SOT-89)	500	mW
Thermal Resistance Junction-Ambient 热阻	R _{θJA} (SOT-89)	250	°C/W
Solder Temperature/Time 焊接温度/时间	T _d	260/10	°C/S
Operating Ambient Temperature 工作温度	T _A	-40~+125	°C
Junction and Storage Temperature 结温和储藏温度	T _J , T _{stg}	-50 to +150 °C	

■ Electrical Characteristics 电特性 ($T_a=25^\circ\text{C}$)


Characteristic 特性参数	Symbol 符号	Test Condition 测试条件	Min 最小值	Type 典型值	Max 最大值	Unit 单位
Output Voltage 输出电压	V_o	$I_o=10\text{mA}$ $V_i=V_o+1\text{V}$	V_{out} $X0.98$	V_{out}	V_{out} $X1.02$	V
Output Current 输出电流	I_o	$V_i-V_o=1.5\text{V}$		500		mA
Dropout Voltage 落差电压	V_D	$I_o=80\text{mA}$ $2.0\text{V} < V_o \leq 2.8\text{V}$		400	600	mV
		$I_o=100\text{mA}$ $2.8\text{V} < V_o \leq 4.0\text{V}$		260	460	
		$I_o=100\text{mA}$ $4.0\text{V} < V_o \leq 5.0\text{V}$		230	420	
		$I_o=200\text{mA}$ $2.8\text{V} < V_o \leq 4.0\text{V}$		530	820	
		$I_o=200\text{mA}$ $4.0\text{V} < V_o \leq 5.0\text{V}$		420	760	
		$I_o=500\text{mA}$ $3\text{V} < V_o \leq 4.0\text{V}$		1500	1800	
		$I_o=500\text{mA}$ $4.0\text{V} < V_o \leq 5.0\text{V}$		1200	1500	
Quiescent Current 静态电流	I_q	$V_i=V_o+1\text{V}$ $I_o=0$		1	2	μA
Line Regulation 线性调整	$\Delta V_o / \Delta V_i * V_o$	$I_o=100\text{mA}$ $4.3 \leq V_i \leq 8$		0.75	0.9	%/V
Load Regulation 负载调整	ΔV_o	$1\text{mA} \leq I_o \leq 100\text{mA}$ $V_i=V_o+1\text{V}$		12	30	mV
Output Short Current 输出短路电流	I_{lim}	$V_o=0\text{V}$		500		mA
Ripple Rejection 纹波抑制	RR	$V_i=V_o+1\text{V}$ $f=1\text{kHz}$		40		dB
Input Voltage 输入电压	V_i		3.5		15	V
Temperature Finger 温度系数	$\Delta V_o / \Delta T_a * V_o$	$I_o=300\text{mA}$ $0^\circ\text{C} \leq T_a \leq 70^\circ\text{C}$		± 100		ppm/ $^\circ\text{C}$

■Typical Characteristic Curve 典型特性曲线


(1) Output Voltage vs Input voltage

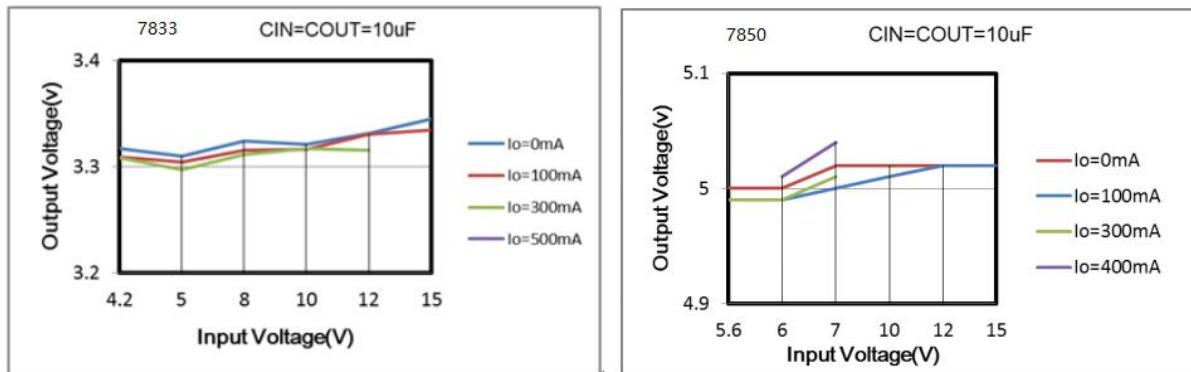

(2) Output Voltage vs. Output Current

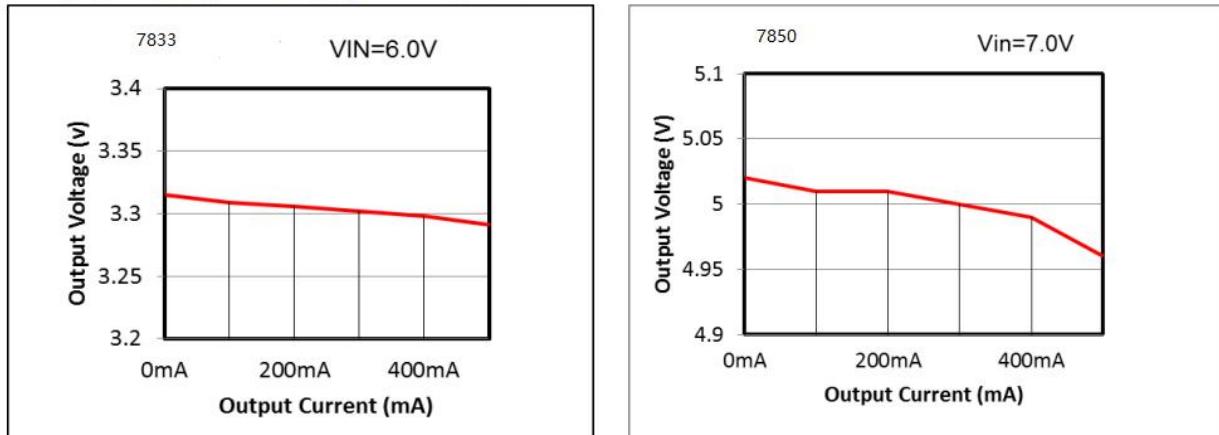

(3) Input Transient Response

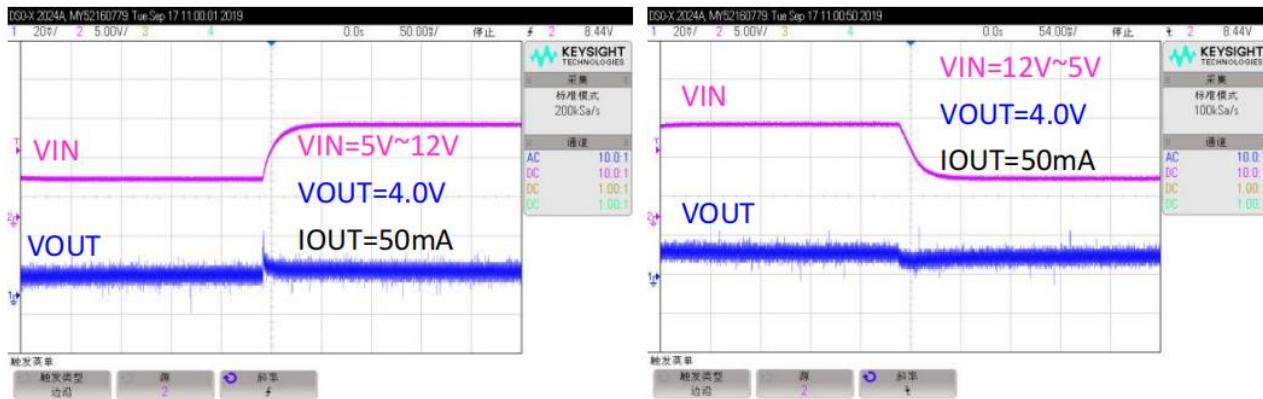


(4) Load Transient Response




■Application Circuit 应用电路


Block Circuit 电路框图

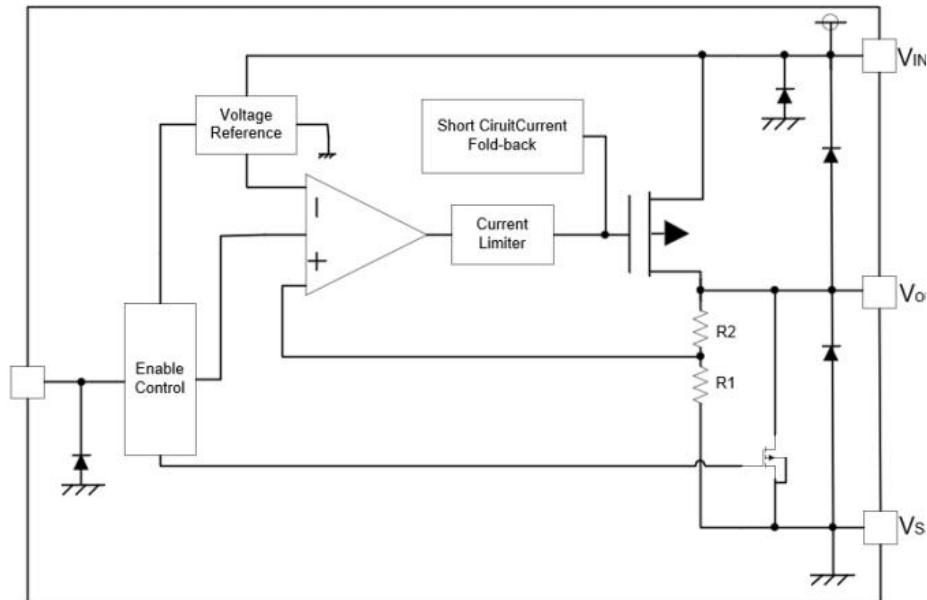

Basic Circuit 基本电路

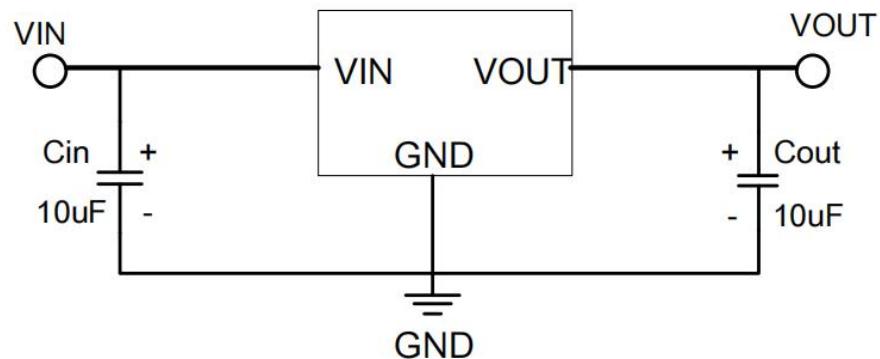

■SOT-89 Dimension 外形封装尺寸

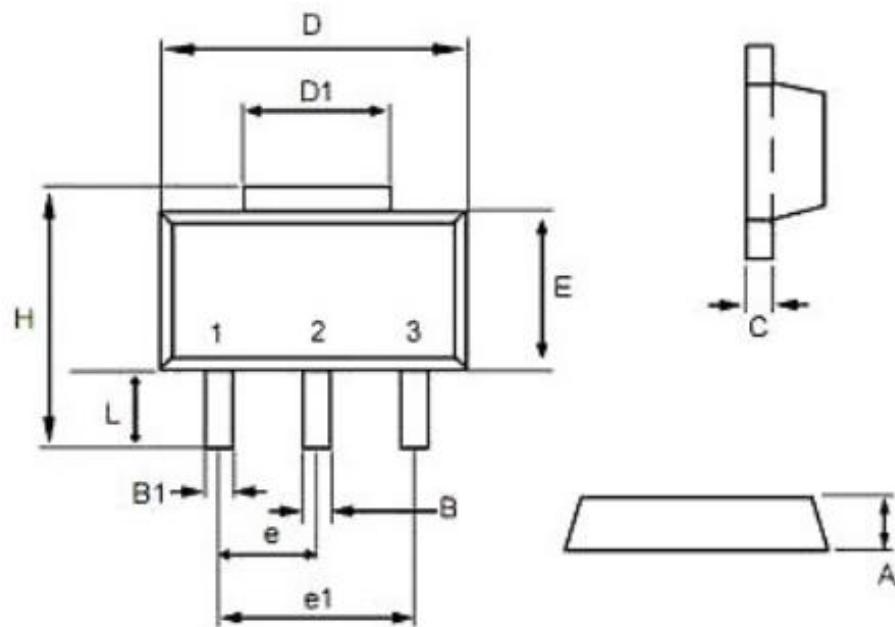

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	1.40	1.60	0.055	0.063
B	0.40	0.56	0.016	0.022
B1	0.35	0.48	0.014	0.019
C	0.35	0.44	0.014	0.017
D	4.40	4.60	0.173	0.181
D1	1.35	1.83	0.053	0.072
e	1.45	1.55	0.057	0.061
e1	2.95	3.05	0.116	0.120
E	2.29	2.60	0.090	0.102
H	3.75	4.25	0.148	0.167
L	0.80	1.20	0.031	0.047